
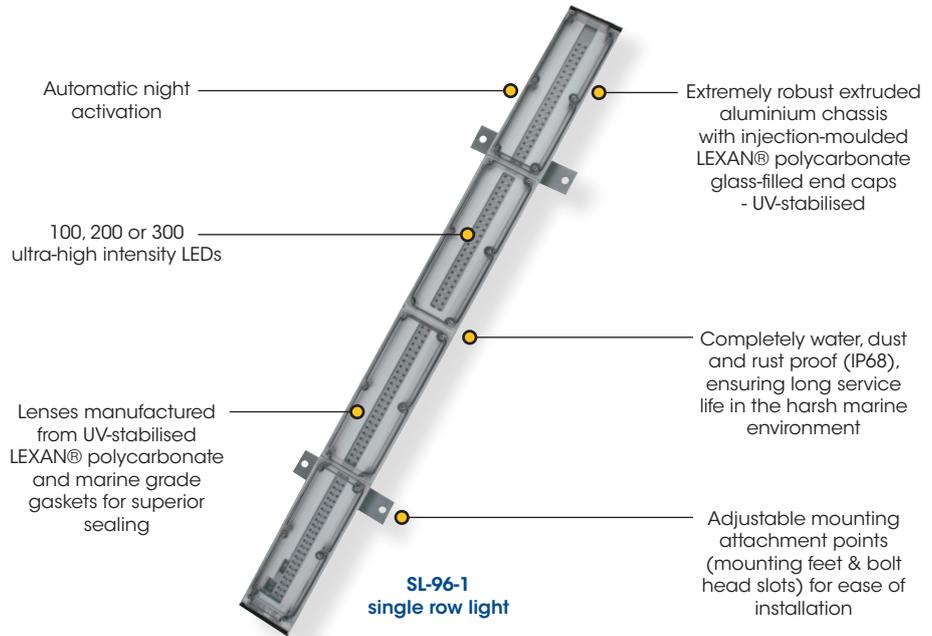


# 4ft Leading Light

SL-96

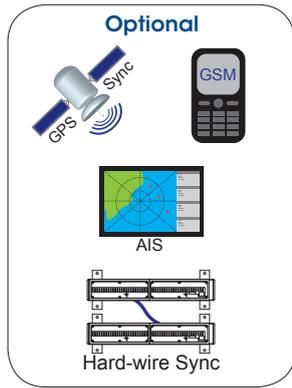

## The Sealite Advantage

- Directional 4ft LED leading light
- 8 - 14.5+ nautical mile range
- Robust design ensures a complete seal suitable for extreme weather conditions
- 256 user-adjustable flash characteristics
- Adjustable intensity settings
- Operates in conjunction with existing or purpose-built power supplies
- Optional GPS Synchronisation & GSM Remote Monitoring
- IP68 waterproof
- Optional solar powered configurations available

## The SL-96 is a 4ft LED leading light offering greater visibility to the smaller SL-48 series.

The unit is available in 3 configurations utilising either single, dual, or triple row LED circuits as a light source.

The advanced circuitry of the SL-96 series comprise of a DC/DC converter, current control and automatic night activation.

The innovative, robust design of the SL-96 leading light ensures years of reliable, maintenance-free service. The unit is completely water, dust & rust proof, and vandal resistant.

The SL-96 body is made from extruded aluminium with injection-moulded UV-stabilised LEXAN® polycarbonate glass-filled end caps for superior strength and durability. Single, dual and triple row versions have the same body width.

Individual injection-moulded LEXAN® polycarbonate lenses are fitted to the aluminium body with a marine grade gasket ensuring a superior sealing (IP68 waterproof).


The aluminium housing features 2x channels/slots which run along the entire length of the base of the SL-96. This multi-mount design allows the 2x mounting brackets/feet to be positioned as required for complete installation flexibility.

The unit operates from a standard 8 - 20 volt power supply, and may be run from a mains powered system or with solar and battery backup in the event of power failure.

The SL-96 leading light is also available with hard-wire or GPS Synchronisation and GSM Remote Monitoring and Control capabilities. When leading lights flash in synchronisation, they can be clearly distinguished from other nav aids and confusing background lighting.



Ease of flash setting selection (where required) via internal rotary switches

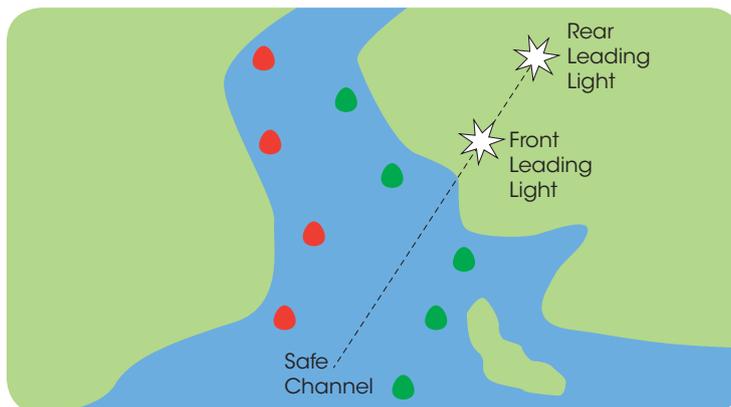

# 4ft Leading Light

SL-96



Swanson Dock, Port of Melbourne, Australia




Port Kembla, Australia



Rigby Island, Australia



Jervis Bay, NSW, Australia

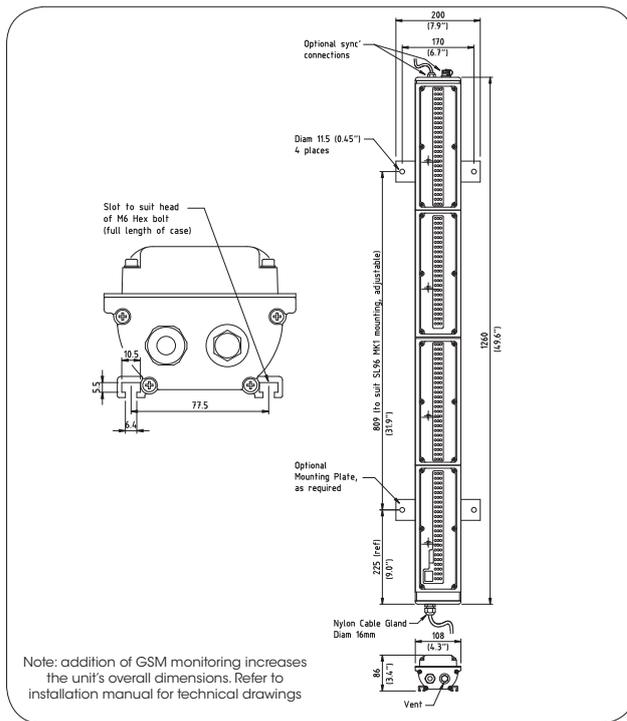

## SPECIFICATIONS\* \* SL-96-1 SL-96-2 SL-96-3

	SL-96-1 Single Row	SL-96-2 Dual Row	SL-96-3 Triple Row
<b>Light Characteristics</b>			
Light Source	100 ultra-high intensity LEDs	200 ultra-high intensity LEDs	300 ultra-high intensity LEDs
Available Colours	Red, Green, White, Yellow, Blue	Red, Green, White, Yellow, Blue	Red, Green, White, Yellow, Blue
Typical Maximum Intensity (cd) †	Red - 3070 Green - 4160 White - 4050 Yellow - 2570 Blue - 620	Red - 5680 Green - 8050 White - 7950 Yellow - 5080 Blue - 1200	Red - 8580 Green - 12050 White - 11900 Yellow - 7500 Blue - 1790
Visible Range (NM)	AT @ 0.74: 8-12+ AT @ 0.85: 10.9-17.5+	AT @ 0.74: 9.5-13+ AT @ 0.85: 13.3-19.2+	AT @ 0.74: 10.5-14.5+ AT @ 0.85: 15-21.7+
Horizontal Output (degrees)	15	15	15
Vertical Divergence (degrees)	15	15	15
Available Flash Characteristics	Up to 256 IALA recommended (user adjustable)	Up to 256 IALA recommended (user adjustable)	Up to 256 IALA recommended (user adjustable)
Intensity Adjustments	User adjustable	User adjustable	User adjustable
LED Life Expectancy (hours)	>100,000	>100,000	>100,000
<b>Electrical Characteristics</b>			
Current Draw (mA)	Red, Yellow - 1020 Blue, Green, White - 860	Red, Yellow - 2040 Blue, Green, White - 1720	Red, Yellow - 3060 Blue, Green, White - 2580
Circuit Protection	Polarity protected	Polarity protected	Polarity protected
Nominal Voltage (V)	12	12	12
Temperature Range	-40 to 80°C	-40 to 80°C	-40 to 80°C
<b>Physical Characteristics</b>			
Body Material	Extruded aluminium chassis with LEXAN® polycarbonate glass-filled end caps - UV-stabilised	Extruded aluminium chassis with LEXAN® polycarbonate glass-filled end caps - UV-stabilised	Extruded aluminium chassis with LEXAN® polycarbonate glass-filled end caps - UV-stabilised
Lens Material	LEXAN® Polycarbonate - UV-stabilised	LEXAN® Polycarbonate - UV-stabilised	LEXAN® Polycarbonate - UV-stabilised
Mounting	Slots to suit head of M6 Hex bolt (full length of light body) & 4 x 11.5mm mounting holes (mounting feet)	Slots to suit head of M6 Hex bolt (full length of light body) & 4 x 11.5mm mounting holes (mounting feet)	Slots to suit head of M6 Hex bolt (full length of light body) & 4 x 11.5mm mounting holes (mounting feet)
Height (mm/inches)	86 / 3 <sup>2</sup> / <sub>5</sub>	86 / 3 <sup>2</sup> / <sub>5</sub>	86 / 3 <sup>2</sup> / <sub>5</sub>
Width (mm/inches)	200 / 7 <sup>7</sup> / <sub>8</sub> (including feet)	200 / 7 <sup>7</sup> / <sub>8</sub> (including feet)	200 / 7 <sup>7</sup> / <sub>8</sub> (including feet)
Length (mm/inches)	1260 / 49 <sup>2</sup> / <sub>3</sub>	1260 / 49 <sup>2</sup> / <sub>3</sub>	1260 / 49 <sup>2</sup> / <sub>3</sub>
Mass (kg/lbs)	7.4 / 16 <sup>1</sup> / <sub>3</sub>	7.6 / 16 <sup>3</sup> / <sub>4</sub>	7.8 / 17 <sup>1</sup> / <sub>5</sub>
Product Life Expectancy	Up to 12 years	Up to 12 years	Up to 12 years
<b>Certifications</b>			
CE	EN61000-6-3:1997. EN61000-6-1:1997	EN61000-6-3:1997. EN61000-6-1:1997	EN61000-6-3:1997. EN61000-6-1:1997
IALA	Signal colours compliant to IALA E-200-1	Signal colours compliant to IALA E-200-1	Signal colours compliant to IALA E-200-1
Quality Assurance	ISO9001:2008	ISO9001:2008	ISO9001:2008
Waterproof	IP68	IP68	IP68
<b>Intellectual Property</b>			
Trademarks	SEALITE® is a registered trademark of Sealite Pty Ltd	SEALITE® is a registered trademark of Sealite Pty Ltd	SEALITE® is a registered trademark of Sealite Pty Ltd
<b>Warranty* * Options Available</b>			
Warranty *	3 years	3 years	3 years
Options Available	<ul style="list-style-type: none"> <li>Power supplies/systems</li> <li>Hard-wire Synchronisation</li> <li>GPS Synchronisation</li> <li>GSM Remote Monitoring &amp; Control Capabilities</li> <li>AIS Remote Monitoring</li> <li>Additional cable</li> </ul>	<ul style="list-style-type: none"> <li>Power supplies/systems</li> <li>Hard-wire Synchronisation</li> <li>GPS Synchronisation</li> <li>GSM Remote Monitoring &amp; Control Capabilities</li> <li>AIS Remote Monitoring</li> <li>Additional cable</li> </ul>	<ul style="list-style-type: none"> <li>Power supplies/systems</li> <li>Hard-wire Synchronisation</li> <li>GPS Synchronisation</li> <li>GSM Remote Monitoring &amp; Control Capabilities</li> <li>AIS Remote Monitoring</li> <li>Additional cable</li> </ul>

CE  
 \* Specifications subject to change or variation without notice  
 \* Subject to standard terms and conditions  
 † Intensity setting subject to solar availability