


# 750mm dia. Marker Buoy

suited to fast water — SL-B750

Sealite have a range of mooring chains & accessories - ask your representative today how we can supply your complete mooring solution

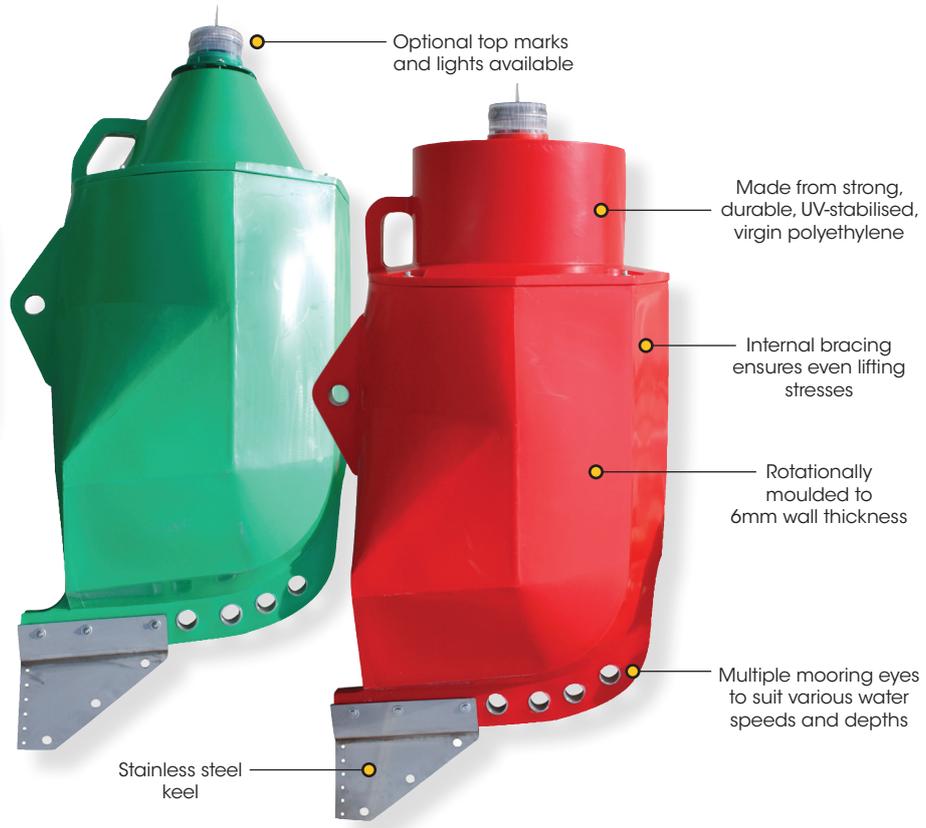

## The Sealite Advantage

- Single piece float
- Complete unit - ready for immediate installation
- Unique design suitable for fast water currents
- High visibility red, green, white or yellow as per IALA recommendations
- 316-grade moulded-in tie bar provides outstanding lifting strength
- Excellent buoyancy & stability

The Sealite SL-B750 is a large 750mm dia. marker buoy designed for a variety of applications and is particularly suited to fast water currents up to 6 knots.

The unique, one piece float section has an internally integrated bow and keel which ensures the buoy remains stable during fast currents.

The SL-B750 is rotationally-moulded from UV-stabilised, virgin polyethylene in a range of IALA recommended configurations and colours to ensure clear visibility, and may be fitted with a Sealite LED lantern for safe night navigation.

The SL-B750 has multiple mooring eyes and counterweight mooring points to facilitate correct operation over varying water depths and speeds up to 6 knots.




Sealite buoy products are made from recyclable materials. As a service to customers, individual components and products at the end of their service life may be returned to Sealite for recycling.

# 750mm dia. Marker Buoy

suited to fast water — SL-B750



Stainless steel keel ensures buoy remains stable in faster water currents

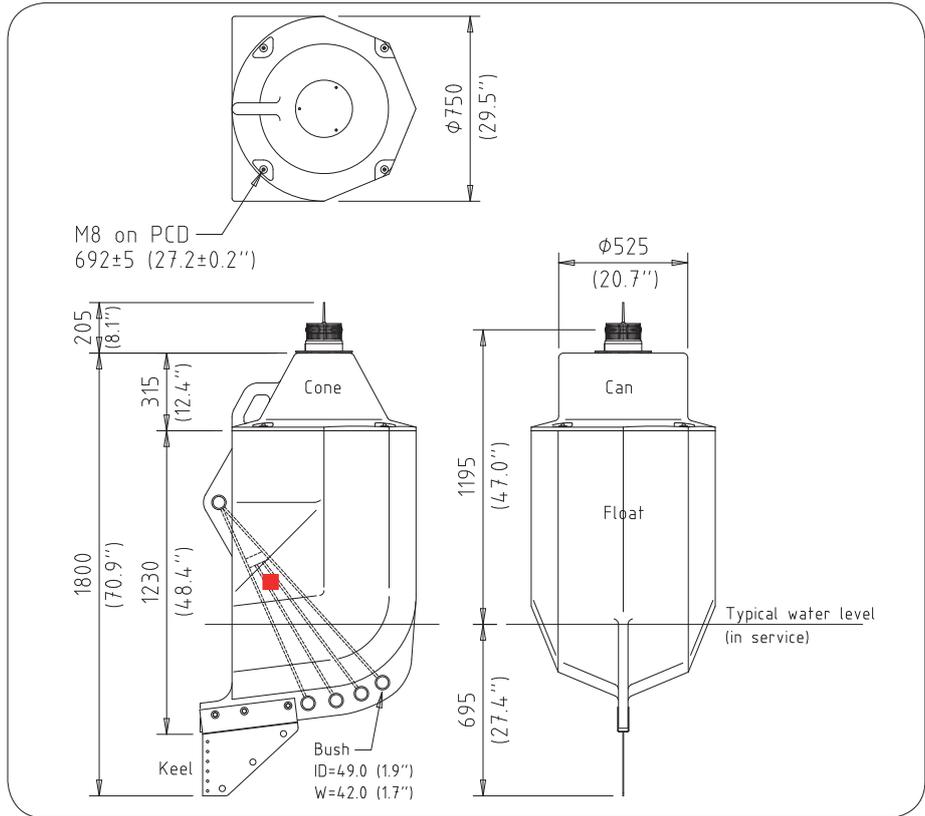

## SPECIFICATIONS\* SL-B750

### General Characteristics

Available Colours	Red, Green, White, Yellow as per IALA Recommendations
Focal Plane Height (mm/inches)	1195 / 147
Total Float Volume (ltrs/US gallon)	412 / 109
Reserve Buoyancy (kgs/lbs)	24 / 53
Maximum Mooring Load (kgs/lbs)	24 / 53
Draft, Maximum (mm/inches)	695 / 27½
Freeboard, Minimum (mm/inches)	790 / 31⅙
Safe Working Load, 1pt (kg/lbs)	1000 / 2205

### Physical Characteristics

Material	Rotationally-moulded UV-stabilised virgin polyethylene
Wall Thickness (mm/inches)	6 / ¼
Ballast (kg/lbs)	20 / 44
Filling	Closed-cell polyurethane foam (float section)
Height (mm/inches)	2005 / 78⅞
Width (mm/inches)	750 / 29½
Mass (kg/lbs)	64 / 141
Product Life Expectancy	Up to 12 years

### Certifications

IALA	Surface colours compliant to IALA E-108
Quality Assurance	ISO9001:2008

### Intellectual Property

Trademarks	SEALITE® is a registered trademark of Sealite Pty Ltd
Warranty *	1 year

### Lantern Options Options Available

- Sealite SL-15, SL-60 or SL-70 lantern
- Mould-in graphics



\* Specifications subject to change or variation without notice  
\* Subject to standard terms and conditions